

P10LU-xxxxE/Z(Hxx)LF



PM3-SERIES

Rev.02-2009

- ✓ 2 Watt
- ✓ Unregulated
- ✓ **Single** and **Dual** Output
- ✓ **SIP7** Case
- ✓ **3 - 6 kV** DC I/O Isolation
- ✓ Low Ripple and Noise

The PM3 series P10LU-xxxxE/Z(Hxx)LF is a family of cost effective 2 W single & dual output DC-DC converters. These converters are in an ultra miniature SIP7 case. Devices are encapsulated. High performance features: 3000VDC up to 6000VDC input/output isolation, high efficiency operation, output voltage accuracy of $\pm 3\%$ maximum, input range of $\pm 10\%$ tolerance and low output ripple and noise.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	$\pm 10\%$
Input Filter	Capacitor
Input Reflected Ripple Current ¹	20 mA pk-pk

Output Specifications

Voltage Accuracy	$\pm 3\%$
Short Circuit Protection	Short Term
Line Regulation	$\pm 1.2\% / 1\%$ Vin Change
Load Regulation (20% - 100%)	$\pm 10\%$ (3.3 Vout Models: $\pm 20\%$)
Ripple and Noise (20Mhz bandwidth)	75 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

General Specifications

Efficiency	See table
I/O Isolation Voltage (3 sec.)	3000 VDC (up to 6000 VDC optional)*
I/O Isolation Capacity	60 pF, typ.
I/O Isolation Resistance	1000 M Ohm
Switching Frequency	80 kHz (Variable)
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	>1.121 Mhrs

Physical Specifications

Case Material	Non Conductive Black Plastic (UL94V-0 rated)
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 2.3g, typ.

Environment Specifications

Operating Temperature	-40 to +85 $^\circ\text{C}$ (ambient)
Maximum Case Temperature	100 $^\circ\text{C}$
Storage Temperature	-40 to +125 $^\circ\text{C}$
Cooling	Free Air Convection (10 mm distance required)
RoHS Conform	Soldering 260 $^\circ\text{C}$, max. (1.5 mm from case 10s.)

Selection Guide

Single Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
SINGLE OUTPUT							
P10LU-053R3ELF	5	30	367	3.3	400	72	470
P10LU-0505ELF	5	30	512	5	400	78	470
P10LU-057R2ELF	5	30	500	7.2	277.7	80	470
P10LU-0509ELF	5	30	500	9	222.2	80	470
P10LU-0512ELF	5	30	487	12	166.7	82	470
P10LU-0515ELF	5	30	487	15	133.3	82	470
P10LU-0518ELF	5	30	487	18	111.1	82	470
P10LU-0524ELF	5	30	487	24	83.3	82	470
P10LU-123R3ELF	12	36	169	3.3	400	65	470
P10LU-1205ELF	12	20	216	5	400	77	470
P10LU-127R2ELF	12	20	208	7.2	277.7	80	470
P10LU-1209ELF	12	20	208	9	222.2	80	470
P10LU-1212ELF	12	20	203	12	166.7	82	470
P10LU-1215ELF	12	20	203	15	133.3	82	470
P10LU-1218ELF	12	20	208	18	111.1	80	470
P10LU-1224ELF	12	20	208	24	83.3	80	470
P10LU-243R3ELF	24	10	76	3.3	400	72	470
P10LU-2405ELF	24	10	105	5	400	79	470
P10LU-247R2ELF	24	10	104	7.2	277.7	80	470
P10LU-2409ELF	24	10	104	9	222.2	80	470
P10LU-2412ELF	24	10	102	12	166.7	80	470
P10LU-2415ELF	24	10	101	15	133.3	82	470
P10LU-2418ELF	24	10	101	18	111.1	82	470
P10LU-2424ELF	24	10	104	24	83.3	80	470
P10LU-483R3ELF	48	6	45	3.3	400	60	470
P10LU-4805ELF	48	6	54	5	400	77	470
P10LU-487R2ELF	48	6	54	7.2	277.7	77	470
P10LU-4809ELF	48	6	54	9	222.2	77	470
P10LU-4812ELF	48	6	53	12	166.7	78	470
P10LU-4815ELF	48	6	53	15	133.3	78	470
P10LU-4818ELF	48	6	53	18	111.1	78	470
P10LU-4824ELF	48	6	55	24	83.3	75	470

If you need other specifications, please enquire.

***OPTIONS:**

H40 = 4000 VDC ISOLATION
H52 = 5200 VDC ISOLATION
H60 = 6000 VDC ISOLATION

For other I/O Isolation please see table on the left hand side and add "Hxx" before LF
(P10LU-2412EH60LF for 6KV)

Selection Guide

Dual Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (µF) ²
DUAL OUTPUT							
P10LU-053R3ZLF	5	30	406	± 3.3	± 200	65	± 220
P10LU-0505ZLF	5	30	555	± 5	± 200	72	± 220
P10LU-057R2ZLF	5	30	555	± 7.2	± 138.8	72	± 220
P10LU-0509ZLF	5	30	519	± 9	± 111.1	77	± 220
P10LU-0512ZLF	5	30	512	± 12	± 83.3	78	± 220
P10LU-0515ZLF	5	30	500	± 15	± 66.67	80	± 220
P10LU-0518ZLF	5	30	500	± 18	± 55.55	80	± 220
P10LU-0524ZLF	5	30	500	± 24	± 41.67	80	± 220
P10LU-123R3ZLF	12	20	164	± 3.3	± 200	67	± 220
P10LU-1205ZLF	12	20	222	± 5	± 200	75	± 220
P10LU-127R2ZLF	12	20	219	± 7.2	± 138.8	76	± 220
P10LU-1209ZLF	12	20	216	± 9	± 111.1	77	± 220
P10LU-1212ZLF	12	20	203	± 12	± 83.3	82	± 220
P10LU-1215ZLF	12	20	203	± 15	± 66.67	82	± 220
P10LU-1218ZLF	12	20	203	± 18	± 55.55	82	± 220
P10LU-1224ZLF	12	20	203	± 24	± 41.67	82	± 220
P10LU-243R3ZLF	24	10	80	± 3.3	± 200	68	± 220
P10LU-2405ZLF	24	10	111	± 5	± 200	75	± 220
P10LU-247R2ZLF	24	10	111	± 7.2	± 138.8	75	± 220
P10LU-2409ZLF	24	10	104	± 9	± 111.1	80	± 220
P10LU-2412ZLF	24	10	101	± 12	± 83.3	82	± 220
P10LU-2415ZLF	24	10	101	± 15	± 66.67	82	± 220
P10LU-2418ZLF	24	10	101	± 18	± 55.55	82	± 220
P10LU-2424ZLF	24	10	101	± 24	± 41.67	82	± 220
P10LU-483R3ZLF	48	6	45	± 3.3	± 200	60	± 220
P10LU-4805ZLF	48	6	57	± 5	± 200	73	± 220
P10LU-487R2ZLF	48	6	54	± 7.2	± 138.8	77	± 220
P10LU-4809ZLF	48	6	54	± 9	± 111.1	77	± 220
P10LU-4812ZLF	48	6	52	± 12	± 83.3	80	± 220
P10LU-4815ZLF	48	6	52	± 15	± 66.67	80	± 220
P10LU-4818ZLF	48	6	52	± 18	± 55.55	80	± 220
P10LU-4824ZLF	48	6	52	± 24	± 41.67	80	± 220



If you need other specifications, please enquire.

***OPTIONS:**

H40 = 4000 VDC ISOLATION
H52 = 5200 VDC ISOLATION
H60 = 6000 VDC ISOLATION

For other I/O Isolation please see table on the left hand side and add "Hxx" before LF (P10LU-2412ZH60LF for 6KV)

Package / Pinning / Derating

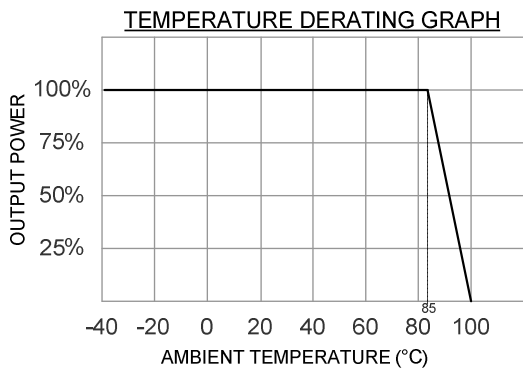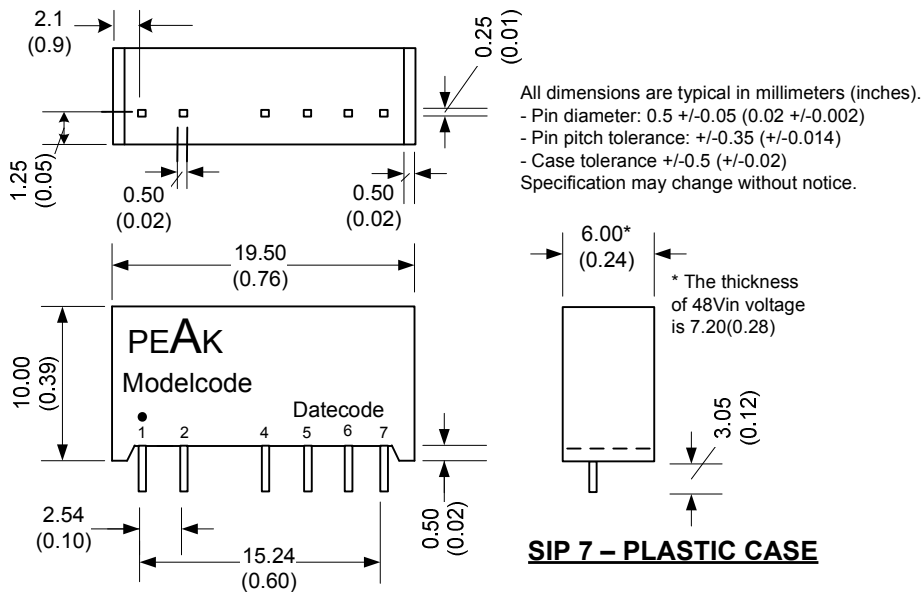

PIN CONNECTIONS		
#	SINGLE ≥3KV	DUAL ≥3KV
1	+Vin	+Vin
2	- Vin	- Vin
4	Omitted	Omitted
5	- Vout	- Vout
6	Omitted	Common
7	+Vout	+Vout

App Notes:

- ¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.
- ² = Tested by minimal Vin and constant resistive load.

- Operation under no-load conditions will not damage these devices, but they will not observe the listed specifications.
 - For reduce converter's ripple & noise, it is recommended to add a 4.7μF~220μF(±4.7μF~±100μF for dual output) capacitor in output end. For EMI performance improvement, it is recommended to add a 12μH inductor and a 10μF~100μF capacitor in input end.

