

1W Isolated DC-DC converter  
Fixed input voltage, unregulated dual output



CB Report Patent Protection  
 UL62368-1 EN62368-1 BS EN62368-1 IEC 62368-1

### FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- Compact SMD package
- I/O isolation test voltage: 3k VDC
- Industry standard pin-out

*E\_XT-1WR3 series are specially designed for applications where two isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.*

### Selection Guide

| Certification      | Part No.     | Input Voltage (VDC) | Output            |                           | Full Load Efficiency (%)<br>Min./Typ. | Capacitive Load(μF)<br>Max.* |      |
|--------------------|--------------|---------------------|-------------------|---------------------------|---------------------------------------|------------------------------|------|
|                    |              | Nominal (Range)     | Voltage (VDC)     | Current (mA)<br>Max./Min. |                                       |                              |      |
| UL/EN/BS<br>EN/IEC | E1205XT-1WR3 | 12<br>(10.8-13.2)   | ±5                | ±100/±10                  | 78/82                                 | 1200                         |      |
|                    | E12Y7XT-1WR3 |                     | ±7.5              | ±67/±7                    | 78/82                                 | 470                          |      |
| UL/EN/BS<br>EN/IEC | E1209XT-1WR3 |                     | ±9                | ±56/±6                    | 79/83                                 | 470                          |      |
|                    | E1212XT-1WR3 |                     | ±12               | ±42/±5                    | 79/83                                 | 220                          |      |
|                    | E1215XT-1WR3 |                     | ±15               | ±34/±4                    | 79/83                                 | 220                          |      |
|                    | E1224XT-1WR3 |                     | ±24               | ±21/±3                    | 81/85                                 | 100                          |      |
|                    | E1515XT-1WR3 |                     | 15<br>(13.5-16.5) | ±15                       | ±34/±4                                | 79/83                        | 220  |
| UL/EN/BS<br>EN/IEC | E2405XT-1WR3 |                     | 24<br>(21.6-26.4) | ±5                        | ±100/±10                              | 76/82                        | 1200 |
|                    |              |                     |                   | ±9                        | ±56/±6                                | 77/83                        | 470  |
|                    |              |                     |                   | ±12                       | ±42/±5                                | 77/83                        | 220  |
|                    |              | ±15                 |                   | ±34/±4                    | 77/83                                 | 220                          |      |
|                    |              | ±24                 |                   | ±21/±3                    | 79/85                                 | 100                          |      |

Note: \* The specified maximum capacitive load for positive and negative output is identical.

### Input Specifications

| Item                                   | Operating Conditions | Min.                             | Typ. | Max.  | Unit   |    |
|--|----------------------|----------------------------------|------|-------|--------|----|
| Input Current<br>(full load / no-load) | 12V input            | ±5VDC/±7.5VDC output             | --   | 102/8 | 107/-- | mA |
|  |                      | ±9VDC/±12VDC/±15VDC output       | --   | 101/8 | 106/-- |    |
|  |                      | ±24VDC output                    | --   | 99/8  | 103/-- |    |
|  | 15V input            | --                               | 81/8 | 85/-- |        |    |
|  | 24V input            | ±5VDC/±9VDC/±12VDC/±15VDC output | --   | 51/8  | 55/--  |    |
| ±24VDC output                          |                      | --                               | 50/8 | 53/-- |        |    |
| Reflected Ripple Current*              |                      | --                               | 15   | --    |        |    |
| Surge Voltage(1sec. max.)              | 12VDC input          | -0.7                             | --   | 18    | VDC    |    |
|  | 15VDC input          | -0.7                             | --   | 21    |        |    |
|  | 24VDC input          | -0.7                             | --   | 30    |        |    |
| Input Filter                           |                      | Capacitance filter               |      |       |        |    |
| Hot Plug                               |                      | Unavailable                      |      |       |        |    |

Note: \* Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

### Output Specifications

| Item                     | Operating Conditions            |  | Min.                                  | Typ.       | Max. | Unit                  |
|--------------------------|---------------------------------|--|---------------------------------------|------------|------|-----------------------|
| Voltage Accuracy         |                                 |  | See output regulation curves (Fig. 1) |            |      |                       |
| Linear Regulation        | Input voltage change: $\pm 1\%$ |  | --                                    | --         | 1.2  | --                    |
| Load Regulation          | 10%-100% load                   | $\pm 5\text{VDC}$ output   | --                                    | 5          | 15   | %                     |
|                          |                                 | $\pm 7.5\text{VDC}$ output   | --                                    | 5          | 15   |                       |
|                          |                                 | $\pm 9\text{VDC}$ output   | --                                    | 3          | 10   |                       |
|                          |                                 | $\pm 12\text{VDC}$ output  | --                                    | 3          | 10   |                       |
|                          |                                 | $\pm 15\text{VDC}$ output  | --                                    | 3          | 10   |                       |
|                          |                                 | $\pm 24\text{VDC}$ output  | --                                    | 2          | 10   |                       |
| Ripple & Noise*          | 20MHz bandwidth                 | $\pm 5\text{VDC}/\pm 7.5\text{VDC}/\pm 9\text{VDC}/$<br>$\pm 12\text{VDC}/\pm 15\text{VDC}$ output | --                                    | 30         | 75   | mVp-p                 |
|                          |                                 | $\pm 24\text{VDC}$ output  | --                                    | 50         | 100  |                       |
|                          |                                 |  | --                                    |            |      |                       |
| Temperature Coefficient  | Full load                       |  | --                                    | $\pm 0.02$ | --   | $\%/^{\circ}\text{C}$ |
| Short-Circuit Protection |                                 |  | Continuous, self-recovery             |            |      |                       |

Note: \* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

| Item                             | Operating Conditions  | Min.  | Typ. | Max. | Unit               |
|----------------------------------|---|---|------|------|--------------------|
| Isolation                        | Input-output electric strength test for 1 minute with a leakage current of 1mA max. | 3000  | --   | --   | VDC                |
| Insulation Resistance            | Input-output resistance at 500VDC   | 1000  | --   | --   | M $\Omega$         |
| Isolation Capacitance            | Input-output capacitance at 100kHz/0.1V   | --  | 20   | --   | pF                 |
| Operating Temperature            | Derating when operating temperature $\geq 100^{\circ}\text{C}$ , (see Fig. 2)       | -40   | --   | 105  | $^{\circ}\text{C}$ |
| Storage Temperature              |   | -55   | --   | 125  |                    |
| Case Temperature Rise            | Ta=25 $^{\circ}\text{C}$  | --  | 25   | --   |                    |
| Storage Humidity                 | Non-condensing  | 5   | --   | 95   | %RH                |
| Reflow Soldering Temperature*    |   | Peak temp. $\leq 245^{\circ}\text{C}$ , maximum duration time $\leq 60\text{s}$ over 217 $^{\circ}\text{C}$ |      |      |                    |
| Vibration                        |   | 10-150Hz, 5G, 0.75mm. along X, Y and Z  |      |      |                    |
| Switching Frequency              | Full load, nominal input voltage  | --  | 260  | --   | kHz                |
| MTBF                             | MIL-HDBK-217F@25 $^{\circ}\text{C}$   | 3500  | --   | --   | k hours            |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1  | Level 1   |      |      |                    |

Note: \* For actual application, please refer to IPC/JEDEC J-STD-020D.1.

### Mechanical Specifications

|                |   |
|----------------|---|
| Case Material  | Black plastic; flame-retardant and heat-resistant (UL94V-0) |
| Dimensions     | 15.24 x 11.40 x 7.25 mm                                     |
| Weight         | 1.4g(Typ.)  |
| Cooling Method | Free air convection   |

### Electromagnetic Compatibility (EMC)

|           |     |  |
|-----------|-----|--|
| Emissions | CE  | CISPR32/EN55032 CLASS B  |
|           | RE  | CISPR32/EN55032 CLASS B  |
| Immunity  | ESD | IEC/EN61000-4-2 Air $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$ perf. Criteria B |

Note: Refer to Fig. 4 for recommended circuit test.

Typical Performance Curves

Output Regulation Curve

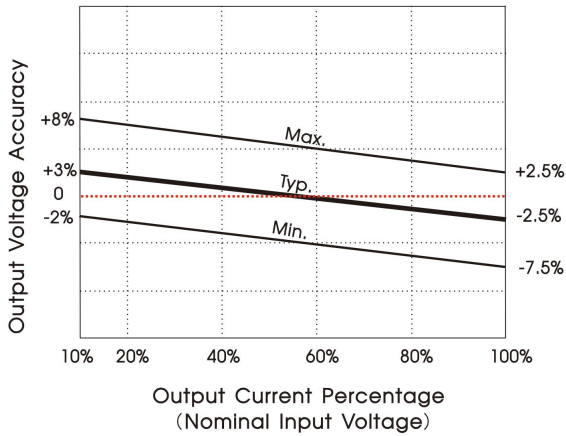


Fig. 1

Temperature Derating Curve



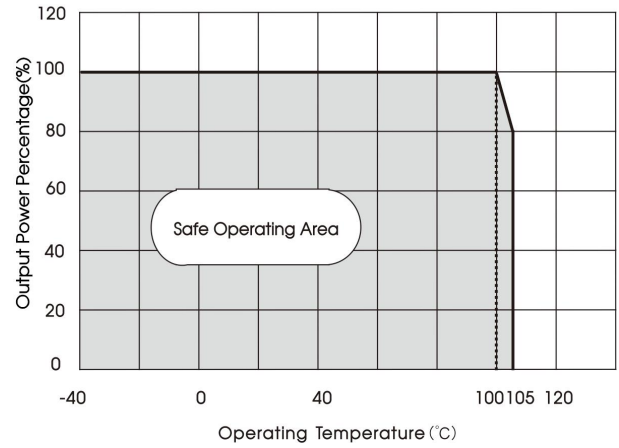


Fig. 2


Efficiency Vs Input Voltage (Full Load)

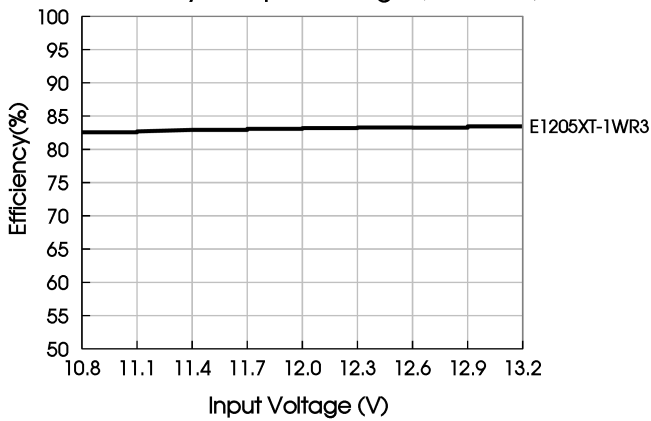


Efficiency Vs Output Load (Vin=12V)

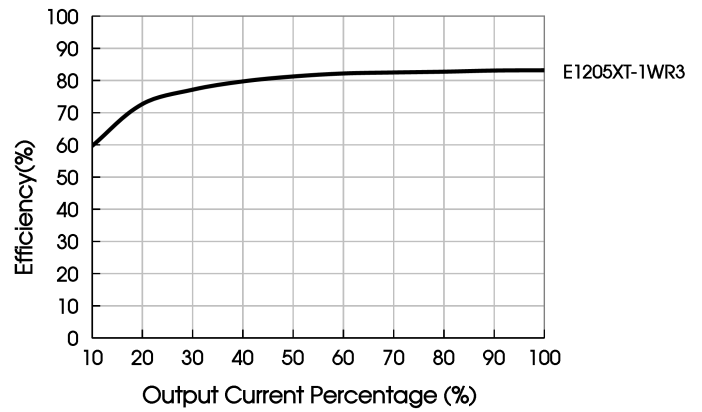

Efficiency Vs Input Voltage (Full Load)

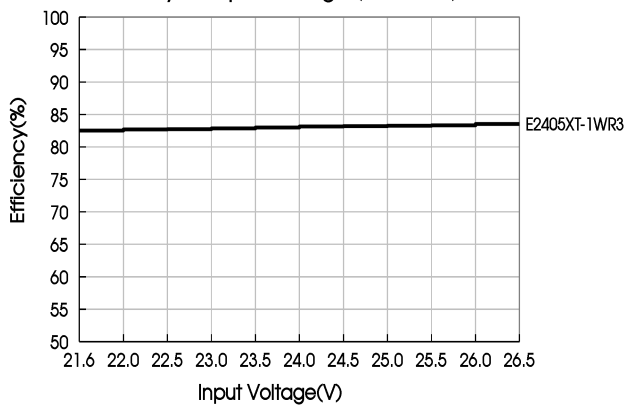

Efficiency Vs Output Load (Vin=24V)

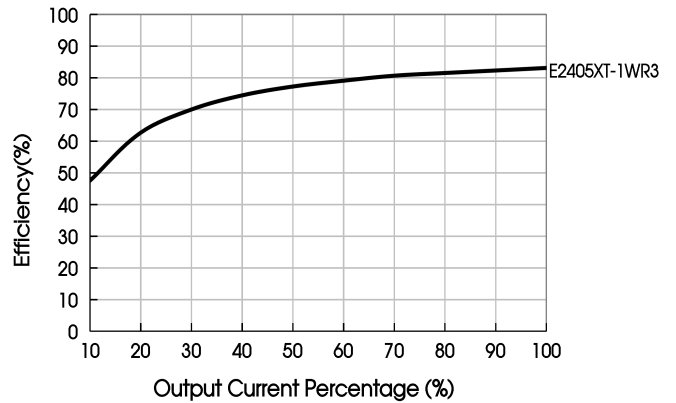

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig. 3

Table 1: Recommended input and output capacitor values

| Vin   | Cin       | Vo      | Cout       |
|-------|-----------|---------|------------|
| 12VDC | 2.2μF/25V | ±5VDC   | 4.7μF/16V  |
| 15VDC | 2.2μF/25V | ±7.5VDC | 1μF/16V    |
| 24VDC | 1μF/50V   | ±9VDC   | 1μF/16V    |
| --    | --        | ±12VDC  | 1μF/25V    |
| --    | --        | ±15VDC  | 0.47μF/25V |
| --    | --        | ±24VDC  | 0.47μF/50V |

2. EMC compliance circuit

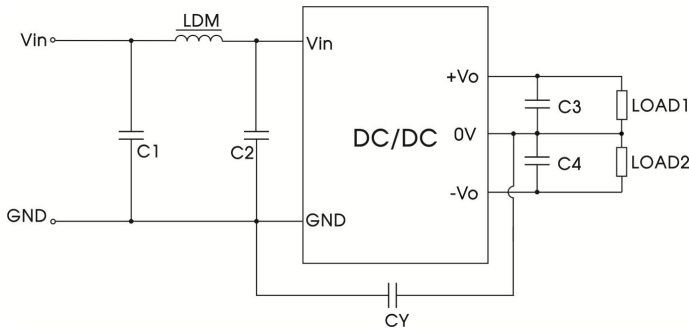



Fig. 4

Table 2: EMC recommended circuit value table

| Emissions | C1/C2 | 4.7μF /50V                   |
|-----------|-------|------------------------------|
|           | CY    | 270pF /3kV                   |
|           | C3/C4 | Refer to the Cout in table 1 |
|           | LDM   | 6.8μH                        |


3. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

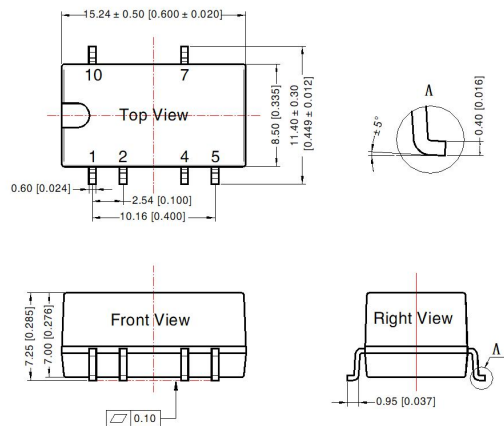

Note:  
Unit: mm[inch]  
Pin section tolerances: ±0.10[±0.004]  
General tolerances: ±0.25[±0.010]

THIRD ANGLE PROJECTION




Note: Grid 2.54\*2.54mm

| Pin-Out |      |
|---------|------|
| Pin     | Mark |
| 1       | GND  |
| 2       | Vin  |
| 4       | 0V   |
| 5       | -Vo  |
| 7       | +Vo  |
| 10      | NC   |

NC: Pin to be isolated from circuitry

Tape and Reel Info

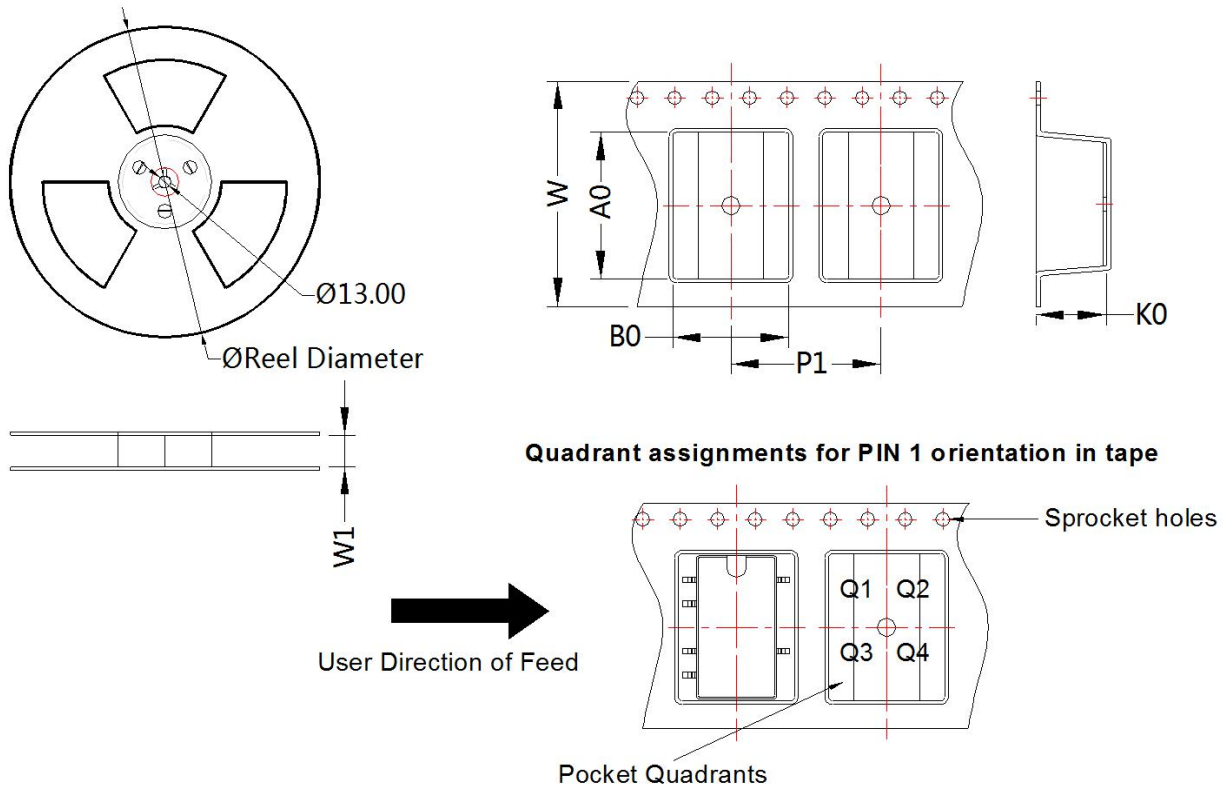

| Device    | Package Type | Pin | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| E_XT-1WR3 | SMD          | 6   | 500 | 330.0              | 24.5               | 15.64   | 12.4    | 7.45    | 16.0    | 24.0   | Q1            |

Notes:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Tube Packaging bag number: 58210023, Roll Packaging bag number: 58210034;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)