


#### Features

- ◆ DIL-24 plastic package
- ◆ Tightly regulated output
- ◆ Very low output noise
- ◆ Short circuit protection
- ◆ Operating temperature range -25°C to +70°C
- ◆ I/O isolation 1'000 VDC
- ◆ Internal filter
- ◆ Industry standard pinout
- ◆ 3-year product warranty

*not recommended for new design in*

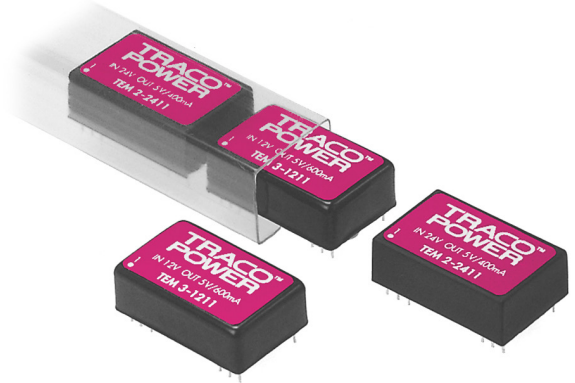

The TEM 2 series is a family of isolated dc/dc converters in a DIP-24 package. They offer tight line/load regulation and 1000 VDC I/O isolation. Standard features include an internal filter to reduce reflected input ripple current and to guarantee low output noise. This product series provides a cost effective solution by many industrial or consumer electronics applications.

Models				
Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEM 2-0511	5 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-0512		12 VDC	165 mA	54 %
TEM 2-0521		±12 VDC	±80 mA	53 %
TEM 2-0522		±15 VDC	±65 mA	51 %
TEM 2-1211	12 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-1212		12 VDC	165 mA	56 %
TEM 2-1221		±12 VDC	±80 mA	59 %
TEM 2-1222		±15 VDC	±65 mA	59 %
TEM 2-2411	24 VDC ±10%	5 VDC	400 mA	51 %
TEM 2-2412		12 VDC	165 mA	61 %
TEM 2-2421		±12 VDC	±80 mA	61 %
TEM 2-2422		±15 VDC	±65 mA	61 %

### Input Specifications

Input current no load	5 Vin models: 80 mA typ. 12 Vin models: 40 mA typ. 24 Vin models: 20 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 7.5 V max. 12 Vin models: 15 V max. 24 Vin models: 30 V max.
Input filter	Pi-Filter

### Output Specifications

Voltage set accuracy	±3 %
Regulation	– Input variation Vin min. to Vin max.      ±0.3 % max. – Load variation 10 – 100 % single output models: ±0.5 % max. dual output models balanced load: ±1.0 % max. dual output models unbalanced load: ±3.0 % max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max
Temperature coefficient	±0.02 %/K
Current limitation	>120 % of Iout max., constant current
Short circuit protection	indefinite
Capacitive load	single output models: 470 µF max. dual output models: 220 µF max.

### General Specifications


Temperature ranges	– Operating      –25°C to +70°C 5 VDC output models: –25°C to +60°C – Case temperature      +95°C max. – Storage      –40°C to +125°C
Derating	3 %/K above +70°C
Humidity (non condensing)	95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>800'000 Mio. h
Isolation voltage (60 sec.)	– Input/Output      1'000 VDC
Isolation capacitance	– Input/Output      100 pF typ.
Isolation resistance	– Input/Output (500 VDC)      >1'000 M Ohm
Switching frequency	80 kHz typ. (Pulse frequency modulation PFM)
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Environmental compliance	– Reach <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> – RoHS      directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	non conductive plastic (UL94V-0 rated)
Weight	12 g (0.42 oz)
Soldering temperature	max. 260°C / 10 sec.

**Outline Dimensions mm (inches)**

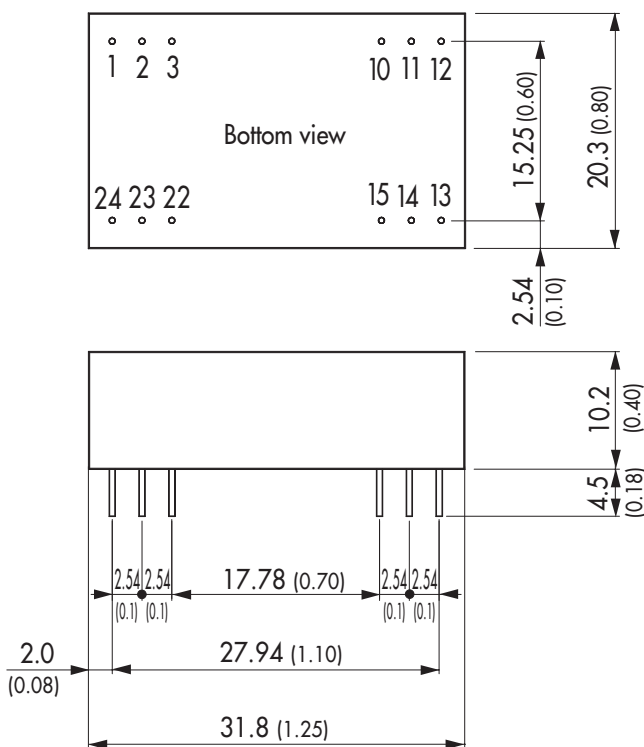

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	ntd.	-Vout
3	ntc.	Common
10	-Vout	Common
11	+Vout	+Vout
12	-Vin (GND)	-Vin (GND)
13	-Vin (GND)	-Vin (GND)
14	+Vout	+Vout
15	-Vout	Common
22	ntc.	Common
23	ntc.	-Vout
24	+Vin (Vcc)	+Vin (Vcc)

ntc. = not to connect

Pin diameter  $\varnothing 0.5 \pm 0.05$  (0.02)  $\pm 0.002$   
Tolerances  $\pm 0.5$  ( $\pm 0.02$ )

Specifications can be changed any time without notice.