

# IDD 10U SERIES

DC - DC CONVERTER  
10W SINGLE & DUAL OUTPUT



## FEATURES

- EFFICIENCY UP TO 89%
- 2:1 & 4:1 WIDE INPUT RANGE
- I/O ISOLATION
- INPUT Pi FILTER
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- UL/cUL/TUV/CE
- 3 YEARS WARRANTY



EN 60950-1



## MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)   (max.)		OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
-----------	---------------	-------------------------------	--	----------------	----------------	----------------	-------------	-------------	-----------------------

### Single Output Models

IDD10 - 03S1U	9~18 VDC	1.00 A	1.34 A	10 WATTS	+ 3.3 VDC	3000 mA	81%	83%	3500 $\mu$ F
IDD10 - 05S1U	9~18 VDC	1.00 A	1.34 A	10 WATTS	+ 5 VDC	2000 mA	83%	85%	3500 $\mu$ F
IDD10 - 12S1U	9~18 VDC	0.95 A	1.30 A	10 WATTS	+ 12 VDC	830 mA	86%	88%	1000 $\mu$ F
IDD10 - 15S1U	9~18 VDC	0.95 A	1.30 A	10 WATTS	+ 15 VDC	670 mA	87%	89%	1000 $\mu$ F
IDD10 - 03S2U	18~36 VDC	0.50 A	0.67 A	10 WATTS	+ 3.3 VDC	3000 mA	80%	82%	3500 $\mu$ F
IDD10 - 05S2U	18~36 VDC	0.49 A	0.67 A	10 WATTS	+ 5 VDC	2000 mA	83%	85%	3500 $\mu$ F
IDD10 - 12S2U	18~36 VDC	0.47 A	0.64 A	10 WATTS	+ 12 VDC	830 mA	86%	88%	1000 $\mu$ F
IDD10 - 15S2U	18~36 VDC	0.48 A	0.64 A	10 WATTS	+ 15 VDC	670 mA	87%	89%	1000 $\mu$ F
IDD10 - 03S3U	35~75 VDC	0.25 A	0.35 A	10 WATTS	+ 3.3 VDC	3000 mA	81%	83%	3500 $\mu$ F
IDD10 - 05S3U	35~75 VDC	0.25 A	0.35 A	10 WATTS	+ 5 VDC	2000 mA	83%	85%	3500 $\mu$ F
IDD10 - 12S3U	35~75 VDC	0.23 A	0.35 A	10 WATTS	+ 12 VDC	830 mA	87%	89%	1000 $\mu$ F
IDD10 - 15S3U	35~75 VDC	0.23 A	0.35 A	10 WATTS	+ 15 VDC	670 mA	87%	89%	1000 $\mu$ F
IDD10 - 03S4U	9~36 VDC	0.52 A	1.41 A	10 WATTS	+ 3.3 VDC	3000 mA	78%	80%	3500 $\mu$ F
IDD10 - 05S4U	9~36 VDC	0.52 A	1.37 A	10 WATTS	+ 5 VDC	2000 mA	80%	82%	3500 $\mu$ F
IDD10 - 12S4U	9~36 VDC	0.49 A	1.37 A	10 WATTS	+ 12 VDC	830 mA	82%	84%	1000 $\mu$ F
IDD10 - 15S4U	9~36 VDC	0.50 A	1.37 A	10 WATTS	+ 15 VDC	670 mA	83%	85%	1000 $\mu$ F
IDD10 - 03S5U	18~75 VDC	0.26 A	0.71 A	10 WATTS	+ 3.3 VDC	3000 mA	78%	80%	3500 $\mu$ F
IDD10 - 05S5U	18~75 VDC	0.26 A	0.70 A	10 WATTS	+ 5 VDC	2000 mA	80%	82%	3500 $\mu$ F
IDD10 - 12S5U	18~75 VDC	0.25 A	0.70 A	10 WATTS	+ 12 VDC	830 mA	82%	84%	1000 $\mu$ F
IDD10 - 15S5U	18~75 VDC	0.25 A	0.70 A	10 WATTS	+ 15 VDC	670 mA	82%	84%	1000 $\mu$ F

### Dual Output Models

IDD10 - 05D1U	9~18 VDC	1.00 A	1.36 A	10 WATTS	$\pm$ 5 VDC	$\pm$ 1000 mA	83%	85%	$\pm$ 3500 $\mu$ F
IDD10 - 12D1U	9~18 VDC	0.96 A	1.33 A	10 WATTS	$\pm$ 12 VDC	$\pm$ 420 mA	85%	87%	$\pm$ 1000 $\mu$ F
IDD10 - 15D1U	9~18 VDC	0.95 A	1.33 A	10 WATTS	$\pm$ 15 VDC	$\pm$ 340 mA	86%	88%	$\pm$ 1000 $\mu$ F
IDD10 - 05D2U	18~36 VDC	0.49 A	0.66 A	10 WATTS	$\pm$ 5 VDC	$\pm$ 1000 mA	84%	86%	$\pm$ 3500 $\mu$ F

### MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT		OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
		(typ.)	(max.)						
<b>Dual Output Models</b>									
IDD10 - 12D2U	18~36 VDC	0.47 A	0.66 A	10 WATTS	± 12 VDC	± 420 mA	85%	87%	± 1000 $\mu$ F
IDD10 - 15D2U	18~36 VDC	0.47 A	0.66 A	10 WATTS	± 15 VDC	± 340 mA	86%	88%	± 1000 $\mu$ F
IDD10 - 05D3U	35~75 VDC	0.24 A	0.34 A	10 WATTS	± 5 VDC	±1000 mA	84%	86%	± 3500 $\mu$ F
IDD10 - 12D3U	35~75 VDC	0.23 A	0.34 A	10 WATTS	± 12 VDC	± 420 mA	87%	89%	± 1000 $\mu$ F
IDD10 - 15D3U	35~75 VDC	0.23 A	0.34 A	10 WATTS	± 15 VDC	± 340 mA	87%	89%	± 1000 $\mu$ F
IDD10 - 05D4U	9~36 VDC	0.51 A	1.40 A	10 WATTS	± 5 VDC	±1000 mA	80%	82%	± 3500 $\mu$ F
IDD10 - 12D4U	9~36 VDC	0.52 A	1.40 A	10 WATTS	± 12 VDC	± 420 mA	80%	82%	± 1000 $\mu$ F
IDD10 - 15D4U	9~36 VDC	0.50 A	1.40 A	10 WATTS	± 15 VDC	± 340 mA	82%	84%	± 1000 $\mu$ F
IDD10 - 05D5U	18~75 VDC	0.26 A	0.70 A	10 WATTS	± 5 VDC	±1000 mA	80%	82%	± 3500 $\mu$ F
IDD10 - 12D5U	18~75 VDC	0.25 A	0.70 A	10 WATTS	± 12 VDC	± 420 mA	81%	83%	± 1000 $\mu$ F
IDD10 - 15D5U	18~75 VDC	0.25 A	0.70 A	10 WATTS	± 15 VDC	± 340 mA	82%	84%	± 1000 $\mu$ F

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL						
Characteristics	Conditions		min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom			200		KHz
Isolation voltage	Input - Output		1,500			VDC
Isolation resistance	Input - Output, @ 500VDC		100			M $\Omega$
Isolation capacitance	100KHz / 1V				1,000	PF
Ambient temperature	Operating at Vi nom, Io nom		-40		+ 71	°C
Case temperature	Operating at Vi nom, Io nom				+100	°C
Derating	Vi nom		See derating curve			
Storage temperature	Non operational		-40		+100	°C
Relative humidity	Vi nom, Io nom		20		95	% RH
Temperature coefficient	Vi nom, Io min				± 0.02	% / °C
Dimension			L50.8 x W25.4 x H10.16			mm
MTBF	Bellcore issue 6@40°C, GB			1,284,000		Hours
Cooling	Free air convection					

INPUT SPECIFICATIONS						
Characteristics	Conditions		min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	2:1	9	12	18	VDC
			18	24	36	VDC
			35	48	75	VDC
		4:1	9	24	36	VDC
			18	48	75	VDC
No load input current	Vi nom, Io = 0	12V		25	mA	
		24V		20	mA	
		48V		15	mA	
Input voltage w/o damage	Io nom	12V		20	VDC	
		24V		40	VDC	
		48V		80	VDC	
startup voltage	Io nom	12V	8.5		VDC	
		24V	16		VDC	
		48V	33		VDC	
Input filter	Pi type					

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			± 2	%
Minimum load	Vi nom single output models	0			%
	Vi nom dual output models (each output)	10			%
Line regulation	Io nom, Vi min ...Vi max			± 1	%
Load regulation	Vi nom, Io 0 ...Io nom, single output models			± 2	%
	Vi nom, Io min ...Io nom, dual output models			± 5	%
Cross regulation (Dual model)	Asymmetrical load 10% - 100% FL			± 5	%
Startup time	Vi nom, Io nom			30	ms
Transient recovery time	Vi nom, I ~0.5 Io nom			500	µs
Ripple & noise *	Vi nom, Io nom, BW = 20MHz		3.3V & 5V	100	mV
			12V, 15V & dual	150	mV
Efficiency	Vi nom, Io nom, Po / Pi	Up to 89%, See model list and efficiency curve			

\* Note : Output must be added 0.1 µF / 35V capacitor when application.

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### CONTROL AND PROTECTION

Input reversed	Shunt diode built in, external fuse recommended 2:1 models (12Vin:1.5A, 24Vin:1A, 48Vin:1A) 4:1 models (24Vin:2A, 48Vin:1A)
Output short circuit	Current limited (Auto-recovery)
Rated over load protection	110%min....160%max

#### APPROVALS AND STANDARD


UL/cUL	UL 60950-1 Recognized
TUV	EN 60950-1
CE	EN 61204-3, EN 55032 Class A, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6 meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)

### PHYSICAL CHARACTERISTICS

Case size	50.8 x 25.4 x 10.16 mm (2 x 1 x 0.4 inches)
Case material	Plastic base / Metal case
Weight	35 g
Potting material	Silicone

### MECHANISM & PIN CONFIGURATION

mm [inch]

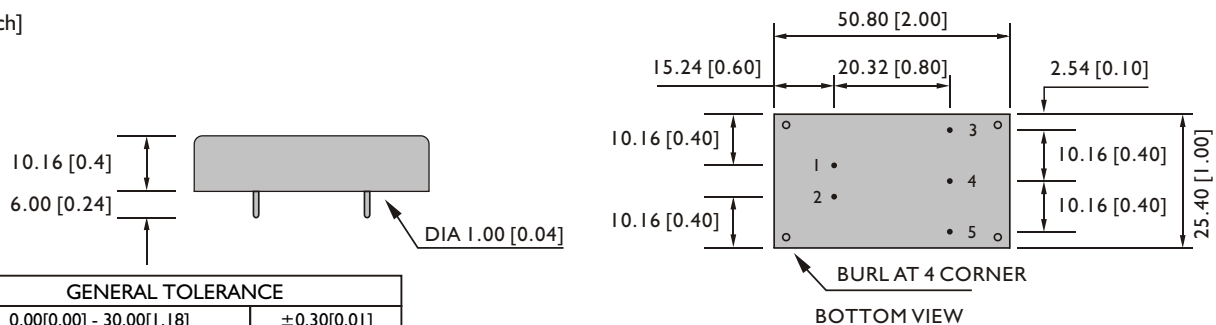

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


### PIN ASSIGNMENT

#### GENERAL


PIN NO.	1	2	3	4	5
SINGLE	Vi+	Vi-	Vo+	NO PIN	Vo-
DUAL	Vi+	Vi-	Vo+	com	Vo-

### CIRCUIT SCHEMATIC

• Block diagram for IDD10U series with single output

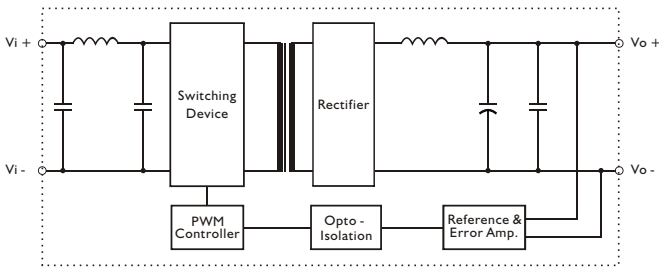


• Block diagram for IDD10U series with dual output

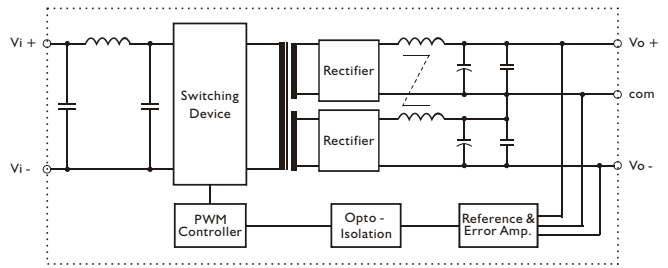


### RECOMMENDED CIRCUIT

• Recommended filter for EN 55032 Class B compliance

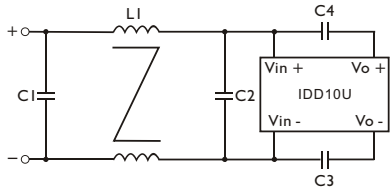

• Recommended EN 55032 Class B filter circuit layout.

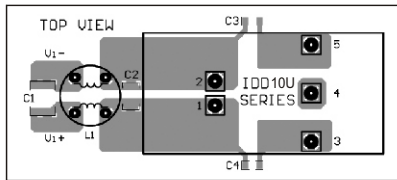


• The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.


	C1	C2	C3	C4	L1
IDD10-XXX1U	3.3 $\mu$ F / 50V MLCC	2.2 $\mu$ F / 50V MLCC	1nF / 2KV MLCC	1nF / 2KV MLCC	500 $\mu$ H Common choke
IDD10-XXX2U	3.3 $\mu$ F / 50V MLCC	2.2 $\mu$ F / 50V MLCC	1nF / 2KV MLCC	1nF / 2KV MLCC	500 $\mu$ H Common choke
IDD10-XXX3U	3.3 $\mu$ F / 100V MLCC	2.2 $\mu$ F / 100V MLCC	1nF / 2KV MLCC	1nF / 2KV MLCC	500 $\mu$ H Common choke
IDD10-XXX4U	3.3 $\mu$ F / 50V MLCC	2.2 $\mu$ F / 50V MLCC	1nF / 2KV MLCC	1nF / 2KV MLCC	500 $\mu$ H Common choke
IDD10-XXX5U	3.3 $\mu$ F / 100V MLCC	2.2 $\mu$ F / 100V MLCC	1nF / 2KV MLCC	1nF / 2KV MLCC	1 mH Common choke

### DERATING AND EFFICIENCY CURVE


Temperature derating curve

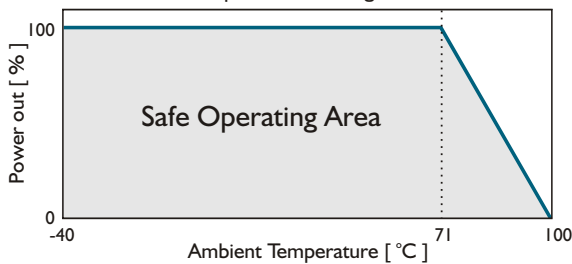


Efficiency Vs Input Voltage IDD10-05S2U

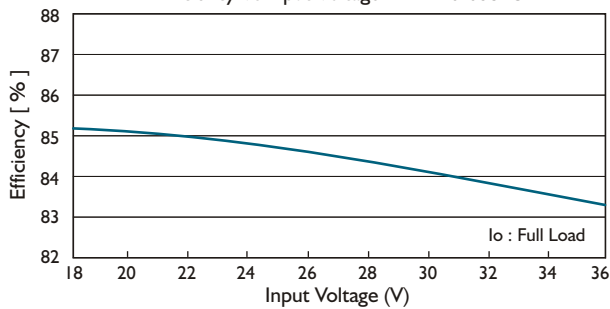

Efficiency Vs Output Load IDD10-05S2U

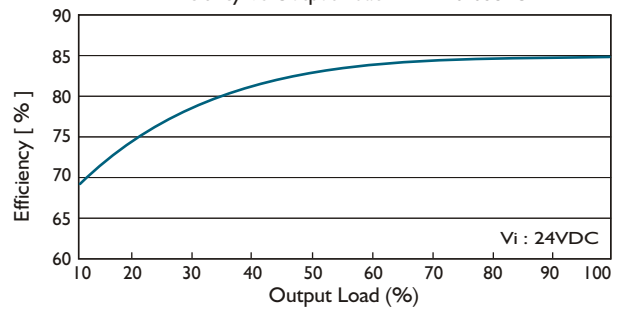

Efficiency Vs Input Voltage IDD10-05S4U

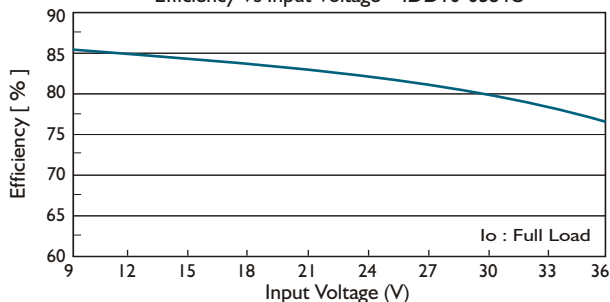

Efficiency Vs Output Load IDD10-05S4U

