









Features

- · Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- · Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

LPF-90D series is a 90W AC/DC LED driver featuring the constant current output. LPF-90D operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the high efficiency up to 90.5%, with the fanless design, the entire series is able to operate for -40% $\sim +70\%$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. LPF-90D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

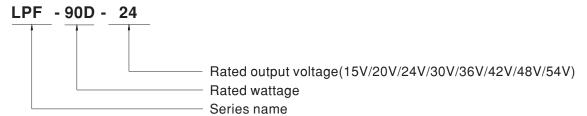

90W Constant Current Mode LED Driver

LPF-90D series

SPECIFICATION


MODEL		LPF-90D-15	LPF-90D-20	LPF-90D-24	LPF-90D-30	LPF-90D-36	LPF-90D-42	LPF-90D-48	LPF-90D-5	
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V	
OUTPUT	RATED CURRENT	5A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A	
	RATED POWER Note.5	75W	90W	90W	90W	90W	90.3W	90.24W	90.18W	
	CONSTANT CURRENT REGION Note.2		12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	CURRENT RIPPLE	5.0% max. @rated current								
	CURRENT TOLERANCE	±5.0%								
	SETUP, RISE TIME Note.6	1200ms, 200ms / 115VAC 500ms, 200ms / 230VAC								
	,	16ms/230VAC 16ms/115VAC 500ms / 230VAC								
	HOLD UP TIME (Typ.)	90 ~ 305VAC 127 ~ 431VDC								
	VOLTAGE RANGE Note.5									
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.96/230VAC, PF≥0.95/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY (Typ.)	89%	89.5%	90%	90.5%	90.5%	90.5%	90.5%	90.5%	
	AC CURRENT	0.95A / 115VAC	0.5A / 23	0.4A	/ 277VAC					
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=435µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A									
	CIRCUIT BREAKER LEAKAGE CURRENT	4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
	LEARAGE CURRENT	<0.75mA/240VAC								
PROTECTION	OVER CURRENT	95 ~ 108%								
			1	ers automatically						
	OVER VOLTAGE	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V	
	0121(1021)102	Shut down o/p voltage, re-power on to recover								
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.	Tcase=+70°C								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)								
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY & EMC	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No.250.13-12, TUV BS EN/EN61347-1, BS EN/EN61347-2-13, EAC TP TC 004, GB19510.1,GB19510.14,IP67 approved; Design refer to UL60950-1								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION Note.8	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 60%) ; BS EN/EN61000-3-3, GB17743 and GB17625.1,EAC TP TC 020								
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV), EAC TP TC 02								
	MTBF	1036.4K hrs min. Telcordia SR-332 (Bellcore); 267.2Khrs min. MIL-HDBK-217F (25°C)								
OTHERS	DIMENSION	161*61*36mm (L*W*H)								
	PACKING	0.7Kg;20pcs/15								
		lly mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.								
NOTE	2. Please refer to "DRIVING METHODS OF LED MODULE".									
	3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.									
	4. Tolerance : includes set up tolerance, line regulation and load regulation.									
	5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.									
		6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.								
	7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the									
	complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.									
	8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch									
	without permanently connected to the mains. 9. This series meets the typical life expectancy of >50,000 hours of operation when Toase, particularly (to) point (or TMP, per DLC), is about 70°C or less									
	1	s meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 70°C or less.								
		refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com bient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500								
		and IP water proof function installation caution, please refer our user manual before using.								
	https://www.meanwell.com	· · · · · · · · · · · · · · · · · · ·								

** Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ BLOCK DIAGRAM

fosc: 100KHz

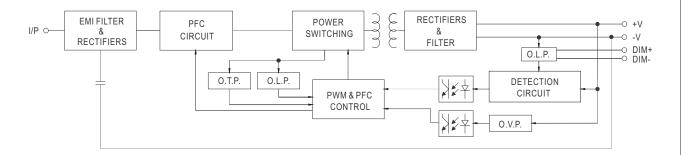

■ DRIVING METHODS OF LED MODULE

* This series works in constant current mode to directly drive the LEDs.

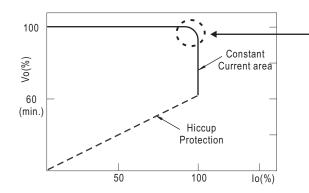

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

※ 3 in 1 dimming function




- $\cdot \ \, \text{Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:}$
- 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

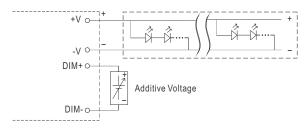


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

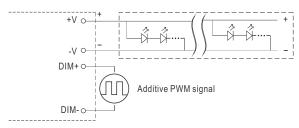



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

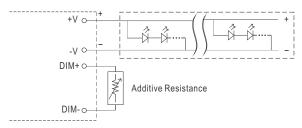

"DO NOT connect "DIM- to -V"














Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

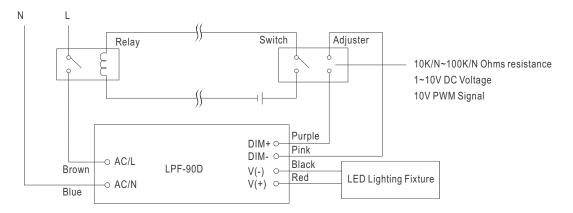


Using a switch and relay can turn ON/OFF the lighting fixture.






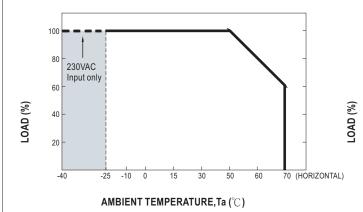

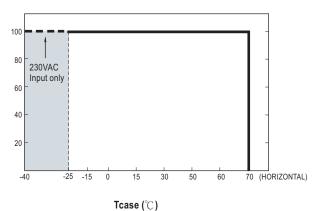

■ STATIC CHARACTERISTIC

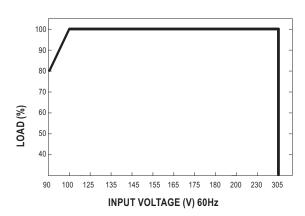


※ De-rating is needed under low input voltage.


■ POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 60°

C

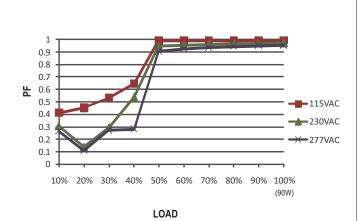


■ TOTAL HARMONIC DISTORTION (THD)

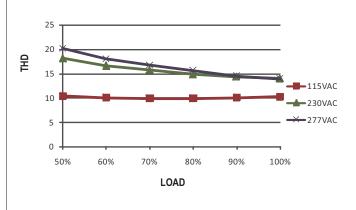

■ EFFICIENCY vs LOAD


LPF-90D series possess superior working efficiency that up to 90.5% can be reached in field applications.

¾ 48V Model, Tcase at 60°C

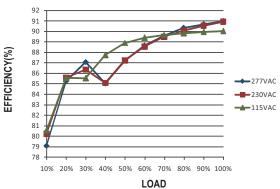




■ LIFE TIME

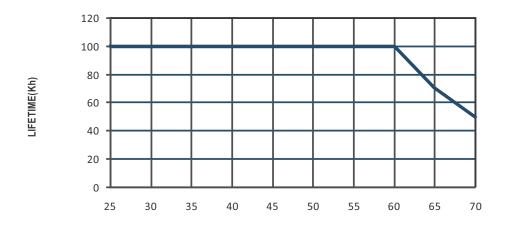



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-90A Unit:mm

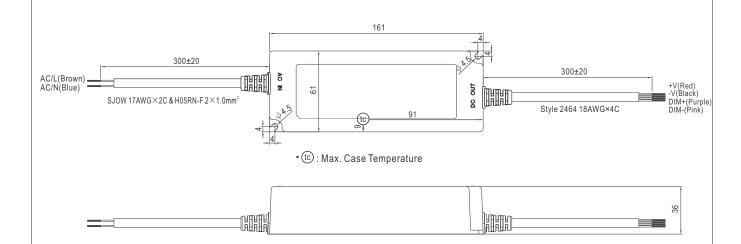

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html