

1W isolated DC-DC converter

Fixed input voltage, regulated single output



FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40℃ to +85℃
- High efficiency up to 71%
- Compact SMD package
- I/O isolation test voltage 3k VDC
- Industry standard pin-out

IF_XT-1WR3 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

		Input Voltage (VDC)	C	Dutput	Full Load	Capacitive
Certification	Part No.	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.	Efficiency (%) Min./Typ.	Load (µF) Max.
	IF1205XT-1WR3		5	200/20	65/69	2400
EN/BS EN	IF1212XT-1WR3	12 (11.4-12.6)	12	84/9	67/71	560
	IF1215XT-1WR3	(11.4 12.0)	15	67/7	67/71	220
	IF1505XT-1WR3	15 (14.25-15.75)	5	200/20	64/68	2400
	IF2405XT-1WR3		5	200/20	63/69	2400
EN/BS EN	IF2412XT-1WR3	24 (22.8-25.2)	12	84/9	65/71	560
	IF2415XT-1WR3		15	67/7	65/71	220

Item	Operating Con	ditions	Min.	Тур.	Max.	Unit	
Input Current (full load / no-load)	10) //	5VDC output		121/8	128/		
	12V input	12VDC/15VDC output		117/8	124/		
	15V input			99/8	105/		
	24V input	5VDC output		60/4	66/	66/ 64/	
		12VDC/15VDC output		59/4	64/		
Reflected Ripple Current*		· · · · · · · · · · · · · · · · · · ·		15			
Input Filter				Capacito	ance Filter		
Hot Plug				Unavailable			

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specification	S					
Item	Operating Conditions	Min.	Тур.	Max.	Unit	
Voltage Accuracy	100% load			±3		
Linear Regulation	Input voltage change: ±1%			±0.25	%	
Load Regulation	10%-100% load			±2		
Ripple & Noise*	20MHz bandwidth		30	100	mVp-p	
Temperature Coefficient	100% load		±0.02		%/ ℃	
Short-circuit Protection		C	Continuous, self-recovery			
	dia wa difa Dianta and Naka tast ala wa safasta DO DO C					

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

MORNSUN[®]

MORNSUN Guangzhou Science & Technology Co., Ltd.

Page 1 of 5

DC/DC Converter

IF_XT-1WR3 Series

MORNSUN[®]

General Specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	3000			VDC
Insulation Resistance	Input-output resistance at 500VDC	1000			MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		20		pF
Operating Temperature	Derating when operating temperature $\geq~71^\circ\!\!\!\mathrm{C}$ (see Fig.1)	-40		85	
Storage Temperature	prage Temperature			125	°C
Case Temperature Rise	Tα=25℃		25		
Storage Humidity	Non-condensing	5		95	%RH
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Reflow Soldering Temperature*			p.≪245℃ <i>,</i> over 217℃		duration
Switching Frequency	100% load, nominal input voltage		260		kHz
MTBF	MIL-HDBK-217F@25°C	3500			k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Lev	vel 1	
Note: *For actual application, please	refer to IPC/JEDEC J-STD-020D.1.				

Mechanical Specifications					
Case Material Black plastic; flame-retardant and heat-resistant (UL94V-0)					
Dimensions	5.24 x 11.40 x 7.25 mm				
Weight	1.2g(Typ.)				
Cooling Method	Free air convection				

Electromagnetic Compatibility (EMC)									
Emissions	CE	CISPR32/EN55032	CLASS B						
	RE	CISPR32/EN55032	CLASS B						
Immunity	ESD	IEC/EN61000-4-2	Air ±8kV, Contact ±6kV perf. Criteria B						
Note: Refer to Fig. 3 for recommended	Note: Refer to Fig. 3 for recommended circuit test.								

Typical Characteristic Curves


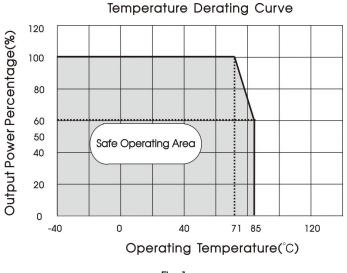


Fig. 1



MORNSUN Guangzhou Science & Technology Co., Ltd.



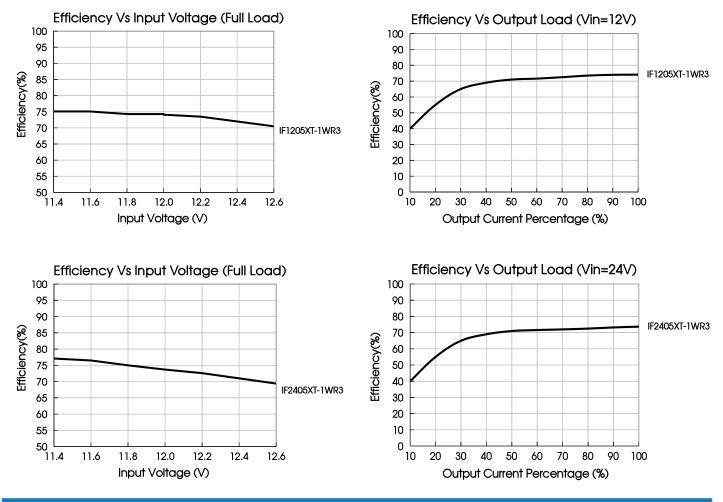

Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fia. 2.


Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig. 2

Тс	Table 1: Recommended input and output capacitor values								
	Vin	Cin	Vo	Cout					
	12VDC	2.2µF/16V	5VDC	10µF/16V					
	15VDC	1µF/25V	12VDC	2.2µF/25V					
	241/00	1. E/50V/							

2. EMC compliance circuit

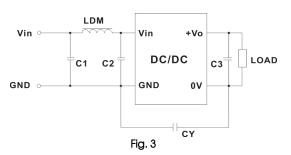

12VDC	2.2µ⊦/16V	5VDC	10µ⊦/16V
15VDC	1µF/25V	12VDC	2.2µF/25V
24VDC	1µF/50V	15VDC	0.47µF/50V

Table 2: Recommended EMC filter values

Outpu	ut voltage	5/12/15VDC
Emissions	C1/C2	4.7µF /50V
	CY	270pF /3kVDC
	C3	Refer to the Cout in table 1
	LDM	6.8µH

3. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com.



MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.01.13-A/2 Page 3 of 5


MORNSUN[®]


2.20 0.480

Dimensions and Recommended Layout


0.60 [0.024]-


Note: Unit: mm[inch]





Pin section tolerances: $\pm 0.10[\pm 0.004]$ General tolerances: $\pm 0.25[\pm 0.010]$





THIRD ANGLE PROJECTION 💮 🚭


2.54 [0.100]

Note: Grid 2.54*2.54mm

Pin	-Out
Pin	Mark
1	GND
2	Vin
4	0V
5	0V
7	+Vo
10	NC

NC: Pin to be isolated from circuitry

Tape and Reel Info

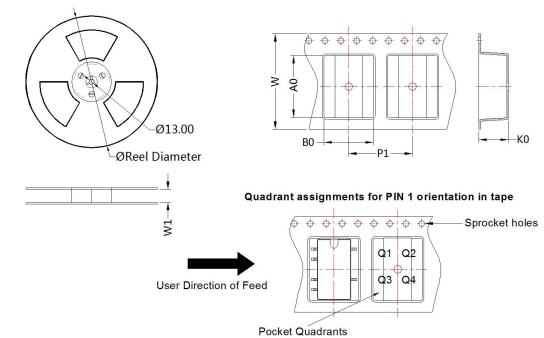

Device	Package Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
IF_XT-1WR3	SMD	6	500	330.0	24.5	15.64	12.4	7.45	16.0	24.0	Q1

MORNSUN Guangzhou Science & Technology Co., Ltd.

MORNSUN®

2022.01.13-A/2

Page 4 of 5



Notes:

1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Tube Packaging bag number: 58210023 , Roll Packaging bag number: 58210034 ;

2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;

3. The maximum capacitive load offered were tested at input voltage range and full load;

4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;

5. All index testing methods in this datasheet are based on our company corporate standards;

6. We can provide product customization service, please contact our technicians directly for specific information;

7. Products are related to laws and regulations: see "Features" and "EMC";

8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.01.13-A/2

Page 5 of 5