

- Compact metal package
- Wide 2:1 input voltage ranges 16.5–36, 33–75 VDC
- Very high efficiency up to 93%
- No minimum load
- Soft start
- Adjustable output voltage +10/-20%
- Sense line
- Remote On/Off input
- Reverse input voltage protection
- Over temperature protection



The TEP 160 Series is a family of isolated high performance DC/DC converter modules with wide 2:1 input voltage ranges which come in a rugged, sealed industry standard half brick package.

A very high efficiency allows full power operation without forced air cooling at 25°C. This temperature can be increased to 40°C with optional mounted heatsink or up to 60°C when mounted on an iron base plate. The very wide input voltage range and reverse input voltage protection make these converters an interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for on board power distribution. This series is available in many optional designs on demand --> see options.

Models				
Order Code	Input Voltage Range	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TEP 160-2412	16.5 - 36 VDC (24 VDC nom.)	12 VDC (9.6 - 13.2 VDC)	13'000 mA	92 %
TEP 160-2413		15 VDC (12.0 - 16.5 VDC)	10'000 mA	92 %
TEP 160-2415		24 VDC (19.2 - 26.4 VDC)	6'500 mA	93 %
TEP 160-2416		28 VDC (22.4 - 30.8 VDC)	5'500 mA	93 %
TEP 160-2418		48 VDC (38.4 - 42.8 VDC)	3'300 mA	92 %
TEP 160-4812	33 - 75 VDC (48 VDC nom.)	12 VDC (9.6 - 13.2 VDC)	16'000 mA	92 %
TEP 160-4813		15 VDC (12.0 - 16.5 VDC)	13'000 mA	93 %
TEP 160-4815		24 VDC (19.2 - 26.4 VDC)	8'000 mA	92 %
TEP 160-4816		28 VDC (22.4 - 30.8 VDC)	7'000 mA	92 %
TEP 160-4818		48 VDC (38.4 - 52.8 VDC)	4'000 mA	92 %
TEP 160-48153		53 VDC (42.4 - 58.3 VDC)	3'700 mA	92 %

Options	
Suffix -CM	- Chassis mount models without filter: www.tracopower.com/products/tep160cm.pdf
Suffix -CMF	- Chassis mount models with filter to meet EN 55032 class A: www.tracopower.com/products/tep160cmf.pdf
TEP-HS1	- Optional Heat Sink: www.tracopower.com/products/tep-hs1.pdf
on demand (backorder with MOQ non stocking item)	<ul style="list-style-type: none"> - Optional model with 3.3 VDC / 40'000 mA Output and 16.5 - 36 VDC Input - Optional model with 5 VDC / 30'000 mA Output and 16.5 - 36 VDC Input - Optional model with 3.3 VDC / 45'000 mA Output and 33 - 75 VDC Input - Optional model with 5 VDC / 34'000 mA Output and 33 - 75 VDC Input - Optional models with Sync pin to synchronize switching frequency of up to 3 units (EMC reason)

Input Specifications	
Input Current	- At no load 24 Vin models: 35 mA typ. 48 Vin models: 25 mA typ.
Surge Voltage	24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Under Voltage Lockout	24 Vin models: 15.5 VDC min. / 16 VDC typ. / 16.3 VDC max. 48 Vin models: 31.6 VDC min. / 32 VDC typ. / 32.5 VDC max.
Recommended Input Fuse	24 Vin models: 15'000 mA (fast acting) 48 Vin models: 10'000 mA (fast acting) (The need of an external fuse has to be assessed in the final application.)
Input Filter	Internal Pi-Type

Output Specifications	
Output Voltage Adjustment	-20% to +10% (By external trim resistor) See application note: www.tracopower.com/overview/tep160 Output power must not exceed rated power!
Voltage Set Accuracy	±1% max.
Regulation	- Input Variation (Vmin - Vmax) 0.1% max. - Load Variation (0 - 100%) 0.1% max.
Ripple and Noise (20 MHz Bandwidth)	3.3 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 5 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 12 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 15 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 24 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 28 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 48 Vout models: 300 mVp-p max. (w/ 2.2 µF X7R) 53 Vout models: 300 mVp-p max. (w/ 2.2 µF X7R)
Capacitive Load	- 24 Vin input 53 Vout models: 690 µF max. 3.3 Vout models: 121'000 µF max. 5 Vout models: 60'000 µF max. 12 Vout models: 10'800 µF max. 15 Vout models: 6'600 µF max. 24 Vout models: 2'700 µF max. 28 Vout models: 1'900 µF max. 48 Vout models: 680 µF max. - 48 Vin input 3.3 Vout models: 136'000 µF max. 5 Vout models: 68'000 µF max. 12 Vout models: 13'300 µF max. 15 Vout models: 8'600 µF max. 24 Vout models: 3'300 µF max. 28 Vout models: 2'500 µF max. 48 Vout models: 830 µF max.
Minimum Load	Not required

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Temperature Coefficient	±0.02 %/K max.
Start-up Time	75 ms typ.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	120 - 150% of I _{out} max.
Overvoltage Protection	115 - 130% of V _{out} nom.
Transient Response	- Response Time 200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Certification Documents	www.tracopower.com/overview/tep160
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/tep160
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 2x KY 200 µF EN 61000-4-6, 10 V _{rms} , perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +75°C +115°C max. -55°C to +125°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tep160
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	120°C typ. (Automatic recovery at 105°C typ.) Case
Cooling System		Natural convection (20 LFM)
Sense Function		10% max. of V _{out} nom. (Sense line to be connected to the output either at the module or at the load under regard of polarity)
Remote Control	- Voltage Controlled Remote - Off Idle Input Current - Remote Pin Input Current	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 3 mA typ. -0.5 to 1.0 mA
Altitude During Operation		5'000 m max. (for basic insulation) 2'000 m max. (for reinforced insulation)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Switching Frequency		225 - 275 kHz (PWM) 250 kHz typ. (PWM)
Insulation System		Basic Insulation
Working Voltage (rated)		145 VAC (3.3 and 5 Vout models) 185 VAC (4.8 and 5.3 Vout models) 172 VAC (other output models)
Isolation Test Voltage	- Input to Output, 60 s - Input to Case, 60 s - Output to Case, 60 s	3'000 VAC 1'600 VDC 1'600 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	380'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Allowed (hermetical product)
	See Cleaning Guideline:	www.tracopower.com/info/cleaning.pdf
Environment	- Vibration - Thermal Shock	MIL-STD-810F MIL-STD-810F
Housing Material		Metal
Base Material		Non-conductive FR4 (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (2 - 3 μm)
Pin Surface Plating		Tin (3 - 5 μm), matte
Housing Type		Metal Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		Half-Brick
Weight		105 g
Thermal Impedance		6.1 K/W 4.6 K/W (with Heat Sink)
Environmental Compliance	- REACH Declaration - RoHS Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-1 (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep160

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

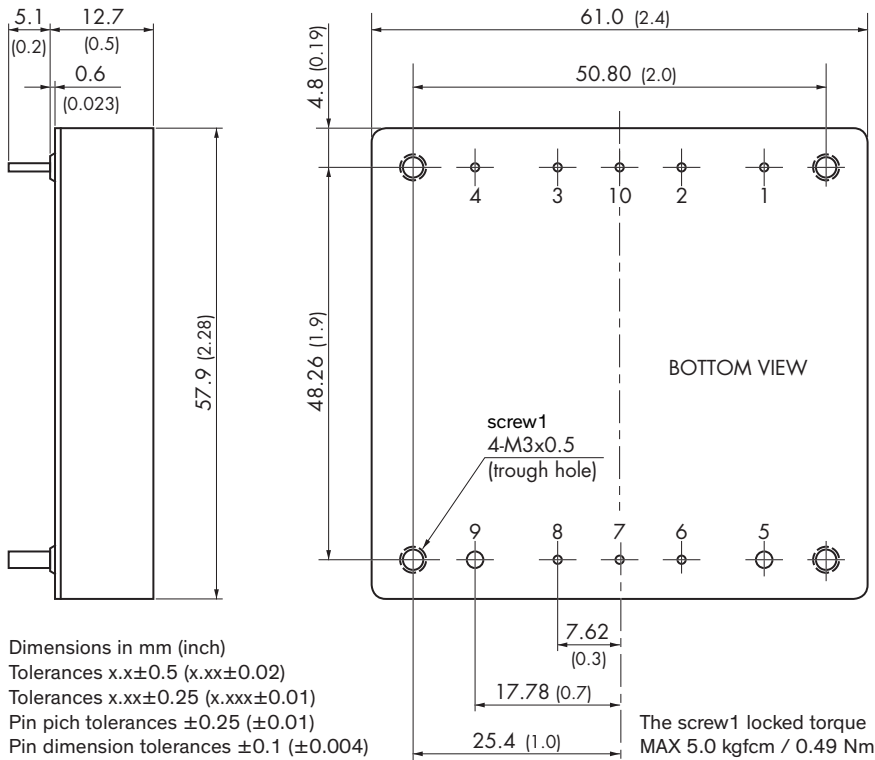

Pinout		
Pin	Single	Pin Diameter
1	-Vin (GND)	1.0 mm (0.04 inch)
2	Case	1.0 mm (0.04 inch)
3	Remote On/Off	1.0 mm (0.04 inch)
4	+Vin (Vcc)	1.0 mm (0.04 inch)
5	-Vout	2.0 mm (0.08 inch)
6	-Sense	1.0 mm (0.04 inch)
7	Trim	1.0 mm (0.04 inch)
8	+Sense	1.0 mm (0.04 inch)
9	+Vout	2.0 mm (0.08 inch)
10	Sync (on demand)	1.0 mm (0.04 inch)